

ASSEMBLY LUBRICANT

RUBBER ASSEMBLY LUBRICANT

PRODUCT DESCRIPTION

Assembly Lubricant is a water based emulsion designed to aid in the assembly process for the installation of all types of rubber tubing, rubber hoses, and tires; where the intention is not to swell or shrink and provide a high degree of lubricity while wet.


PRODUCT BENEFITS

- Specially formulated to lubricate rubber for easier installation, removal and manipulation
- Provides temporary lubrication as lubricant disappears and surfaces return to original condition
- Provides high degree of lubricity while wet

DIRECTIONS FOR USE

Assembly Lubricant should be applied sparingly by hand. The seal should then be installed with the coated side toward the bottom of the groove. Do not apply an excessive amount of compound to the seal. An excessive amount of Assembly Lubricant can cause the seal to be displaced and also result in the material getting in areas, such as threads, which will have an adverse affect.

PRODUCT APPLICATION

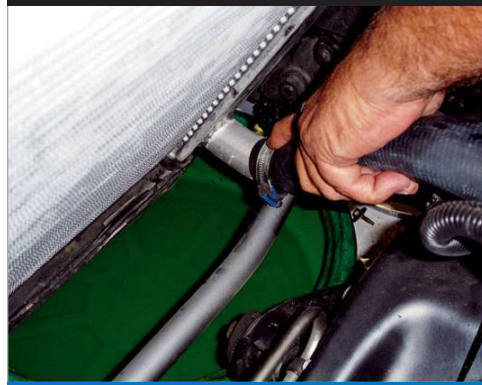

Installation Aid For:

- Rubber Tubing
- Rubber Hoses
- Tires
- O-Rings

TYPICAL PROPERTIES

Appearance	White opaque
Specific Gravity (g/ml)	0.90
Flash Point (PMCC)	not applicable, water based
Freeze Point (Do Not Freeze)	32°F (0°C)

PRODUCT NUMBER

8425300000

HEALTH AND SAFETY

For health and safety guidance, please refer to the Chemtool SDS (Safety Data Sheets).