

DRY MOLY FILM LUBRICANT AND COATING

NON-CHLORINATED, DRY FILM LUBRICANT


PRODUCT DESCRIPTION

Dry Moly Film Lubricant And Coating is an extreme condition, dry, friction reducing lubricant and anti-seize coating. Withstands high temperatures and extreme pressures. Provides a dry film lubricant especially suited for use in dirty or dusty atmospheres. Burnishes into metal to provide long term lubrication and protection. Inert to water, oil, alkalis, and acids. Contains no methylene chloride.

PRODUCT BENEFITS

- Non-corrosive, non-conductive, waterproof
- Film has low coefficient of friction
- Provides excellent lubricating properties
- Does not attract dust or dirt
- Adheres to metals, rubber, glass, and most plastics
- Inert to water, oil, alkalies, and many acids
- Resists temperatures from -110° to 1050°F (-79° to 566°C) and pressures to 100,000 psi

PRODUCT APPLICATION

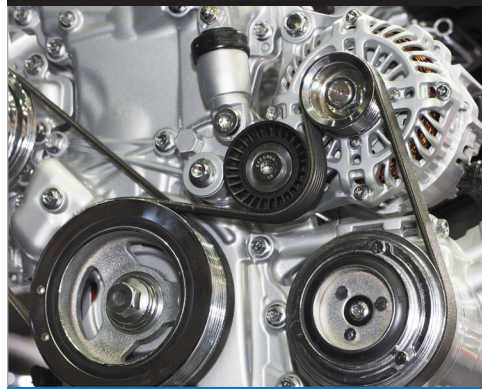

For use on any of the following:

- Gaskets
- Belts
- Tracks
- Chains
- Hoists
- Rollers
- Wheels
- Snow blowers
- Lawn mowers

PRODUCT NUMBER

9600000376

HEALTH AND SAFETY

For health and safety guidance, please refer to the Chemtool SDS (Safety Data Sheets).