

LIQUID GASKET-A

BRUSHABLE GASKET MATERIAL

PRODUCT DESCRIPTION

Liquid Gasket-A is a quick drying, liquid gasket material designed for a wide variety of applications. This brushable, liquid product dries to a permanently flexible gasket material. Liquid Gasket-A withstands temperatures up to 300°F (149°C), or air or hydraulic pressures of 90 psi (620 kPa) and seals up to .003" (.08 mm). This product does not contain chlorinated solvents and will not cause corrosion on aluminum parts. It contains Acetone and therefore is highly flammable. It resists most automotive and industrial fluids and allows for easy disassembly.

Applications include flanges, gaskets, hose and threaded connections, rear axle assembly, differential assembly, waterproofing electrical terminals and wires, weather stripping and tubeless tire beads.


PRODUCT BENEFITS

- Brushable liquid
- Quick drying
- Withstands temperatures up to 300°F (149°C)
- Withstands pneumatic or hydraulic pressure 90 psi (620 kPa) and seals up to 0.003" (0.08 mm)
- No chlorinated solvents
- Will not cause corrosion on aluminum parts

DIRECTIONS FOR USE

Store and apply at room temperatures. Clean all surfaces to remove dirt, oil, rust, paints, and old gasket or sealant. Keep surfaces dry and clean prior to applying. Using brush or squeeze tube, apply a thin, even coat on both surfaces to be assembled. Allow Liquid Gasket-A material to set and solvent to evaporate prior to assembly. Do not use in pure oxygen environment or as a sealant for chlorine or other strong oxidizing materials.

PRODUCT APPLICATION

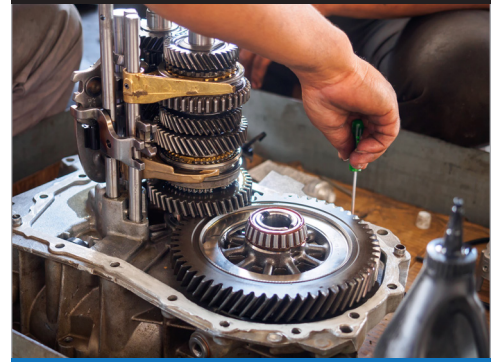

LIQUID GASKET-A

TYPICAL PROPERTIES

Appearance	Thick red liquid
Solids	18-20%
Specific Gravity @ 60°F (15°C)	0.780
Flash Point (TCC)	-4°F (-20°C)
Tensile Strength, Mpa	>22.0
Elongation	400%
300% Modulus, Mpa	11.0

PRODUCT NUMBER

8431000000

HEALTH AND SAFETY

For health and safety guidance, please refer to the Chemtool SDS (Safety Data Sheets).